

COSMO® Composite panels

Unlimited possibilities for design



weiss



Quality, service and high delivery reliability are the basic pillars of the success of our group of companies. We have continuously improved and further developed our portfolio in the last years; this also includes the acquisition of new companies. By now, about 325 employees at four sites participate in the success of our group.



Company

By pooling the core competences of our business segments of adhesives and composite panels under a single roof, we are able to offer solutions from one source to our customers that are efficient and of high technical quality.

We are among the leading manufacturers in these two business segments in Europe and moreover, we also increasingly sell our products outside of Europe, such as in China, Russia and the USA.

Company history

Since the company's foundation in 1815, Weiss has developed from a small hide-glue producer to an internationally acting, industrial company for modern adhesive systems and composite panels. With a passion for quality and the aspiration to meet our customers' high expectations, we are a recognised and reliable partner on the market.

! Weiss is the only enterprise that produces adhesives and composite panels.

Powerful product range

Division
Adhesives



Durably firm joints

Traditional bonding technologies like riveting, soldering, welding, or screwing are more and more replaced by modern adhesive systems, resulting in many advantages. Our product range includes more than 400 variants of surface and construction adhesive and superglues, as well as special adhesives for a wide variety of applications.


Division
Composite panels



Unlimited possibilities for design

Our range of products includes more than 5,000 variants of composite panels. Because there is a large number of top coats and core materials available as well as the possibility of combining and processing them in many different ways, a vast number of creative designs results for the finished element.

PUDOL
Cleaning and maintenance products

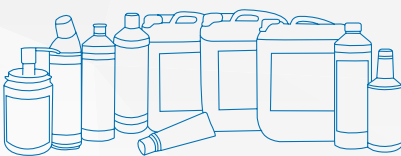

Cleanliness refreshes your senses

PUDOL stands for convincing quality of special products in the field of commercial cleaning. In addition to a complete range of cleaning and care products for different applications, we are offering a comprehensive service with interesting solutions and benefits.

A subsidiary
of the Weiss Group

Applications

p. 4

Competencies
Certified
Quality

p. 5

Design
Composite panel

p. 6

COSMO®
Therm

Heat-insulating
composite panels

ALU	7
ALU/HD	9
ALU/Stucco	10
PVC	11
HPL	14
HPL/HD	15
GFK	17
EPO/HD	18
Quick-Tape	18
SPE	20

COSMO®
Silent

Sound-insulating
composite panels

ALU	21
PVC	22
HPL	22
HPL/HD	23
Quick-Tape	23

COSMO®
Protect

Burglar/penetra-
tion-resistive

ALU	24
PVC	24

COSMO®
Design

Grooved
composite panels

SPE	26
ALU	27
PVC	27
HPL	27

COSMO®
Tech

Customised
composite panels

PVC	28
HPL	29
GFK	30

COSMO®
Frame

Frame widening
elements

PVC	32
-----	----

Interactive
communication

p. 34

Applications

COSMO® Composite Panels & Façade Elements

Unlimited possibilities for design

Are you looking for a suitable composite panel for your application in industry or trade? Then, here is just the right place to be for you!

Our range of composite panels currently includes more than 5,000 variants. These solely consist of high grade material components and are bonded with a long-term approved adhesive system that has especially been developed for this purpose in our house. The result is a Premium Composite Panel that can fully convince with its quality, robustness and durability.

Because there is a large number of top coats and core materials available as well as there is the possibility of combining them in many different ways, a vast number of creative designs results for the finished composite panel.

As a member of the ift (Institut für Fenstertechnik), we regularly test newly and further developed composite panels for heat and noise reducing and/or penetration-resistive properties. With this, we are offering the maximum level of safety to you, because the measured test values are not only achieved in practice but often exceeded.

Fields of application

We are offering suitable composite panels for many different fields of application.



Automotive manufacturing



Door construction



Industry



Burglar/penetration resistance



Trailer construction



Gate construction



Partition panel construction



Fire protection



Container construction



Window and façade



Ship and yacht building



Sound proofing



Development

In close cooperation with our customers we create solutions that are customised for the respective range of application.

Our team of materials testers and application engineers with long-term experience in the fields of materials science and building physics would be pleased to be on hand with advice to help you.



Customer-specific solutions

We are offering customised composite panels for your special applications. Because a large number of different top coats and core materials is available as well as there is the possibility of combining them in many different ways, a vast number of creative designs results for the finished element.



Delivery service

With our range of products of more than 5,000 article variants we are offering to our customers a large assortment of heat and sound-insulating composite panels.

In addition, many of our core products are constantly available from our warehouse or will be deliverable in a short time.

Certified quality

Weiss delivers composite panels of constant top-quality. In order to be able to permanently ensure this quality, we are cooperating with different testing institutes, e.g. ift Rosenheim, MPA NRW and CSTB.



Burglary resistance measured by ball test
DIN EN 356 P5A



Pendulum test
DIN EN 12600 class



Burglary resistance measured by axe test
DIN EN 356, P6B to P8B



Thermal performance
as per EN ISO 10077-2



Airborne sound insulation
as per EN ISO 717-1



Fire protection
as per DIN 4102-1 and EN 13501-1


! Various test certificates are available for the mentioned tests.

Design of composite panels

COSMO® Composite Panels & Façade Elements



Our composite panels are composed of a variety of different material combinations that can be designed individually.

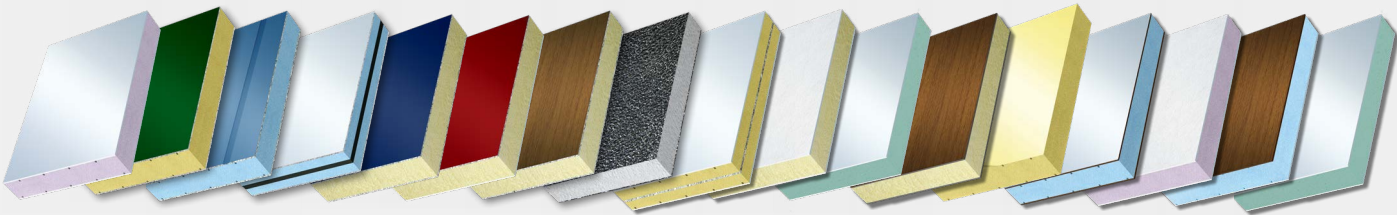

Top coats

The external layers of a composite panel are called top coats and can consist of the following materials:

- **ALU** (aluminium)
- **PVC** (polyvinylchloride)
- **HPL** (high-pressure laminated panels)
- **GFK** (GRP - glass fibre reinforced plastics)
- **CFK** (carbon fibre reinforced plastics)
- **EPO** (epoxy resin)
- **HD** (decorative films)
- **SPE** (plywood)
- **DSP** (thin chipboard)

The upper and the lower top coat can consist of the same material or of different materials.

Core material


"Core material" is our designation for the inner components of our composite panels that can consist of the following materials:

- **XPS** (extruded polystyrene rigid foam)
- **PUR** (polyurethane rigid foam)
- **TK** (thermoplastic plastics)
- **MIN** (mineral fibre insulating material)
- **PR** (polyurethane recycling panel)
- **EPS** (expanded polystyrene rigid foam)
- **PUR/AL** (polyurethane rigid foam/ aluminium)

Special inserts

- Sound-insulating heavy film
- Burglar-resistant aluminium insert

Design

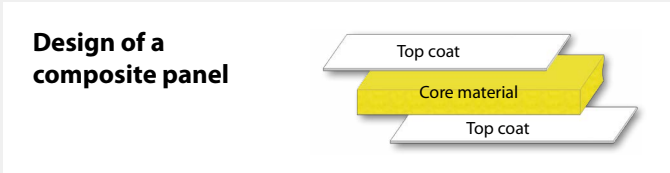

COSMO® Therm

Heat-insulating composite panels

For many years, these composite panels with different plastic, aluminium and wood surfaces have proven to be successful. Because there is a large number of top coats and core materials available as well as there is the possibility of combining them in many different ways, a vast number of creative designs results for the finished element.

COSMO® Therm - ALU

ALU on both sides, XPS core



Top coats

Aluminium coated as per RAL, NCS or DB colour system, other special colours on request, also deliverable with anodized surface

Core material

Polystyrene-rigid foam, extruded (XPS)

tests

- Pendulum test as per DIN EN 12600 class 1
- Reaction to fire test as per DIN EN 13501-1 / Class of fire E

Special Properties


- Moisture-resistant
- Free from CFC and HCFC

Standard sizes (mm)

Top coat 1.0 mm: 2500x1250, 3000x1500

Top coat 1.2 mm: 2000x900, 2000x1000, 2500x1250, 3000x1500

Top coat 1.5 mm: 2000x900, 2000x1000, 2500x1250, 3000x1500



Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m²)	Sound insulation factor (dB)	Lambda value (W/mK)	U-value (W/m²K)
20	1.0	18	6.5	28	0.033	1.398
20	1.2	18	7.6	28	0.033	1.398
20	1.5	17	9.2	28	0.033	1.459
24	1.0	22	6.7	28	0.033	1.195
24	1.2	22	7.7	28	0.033	1.195
24	1.5	21	9.3	28	0.033	1.240
27	1.0	25	6.8	28	0.033	1.078
27	1.2	25	7.8	28	0.033	1.078
27	1.5	24	9.4	28	0.033	1.114
30	1.0	28	6.9	28	0.033	0.982
30	1.2	28	7.9	28	0.033	0.982
30	1.5	27	9.5	28	0.033	1.012
33	1.0	31	7.0	28	0.033	0.901
33	1.2	31	8.0	28	0.033	0.901
33	1.5	30	9.6	28	0.033	0.927

COSMO® Therm

Heat-insulating composite panels

COSMO® Therm - ALU

ALU on both sides, PUR core

Top coats

Aluminium coated as per RAL, NCS or DB colour system, other special colours on request, also deliverable with anodized surface

Core material

Polyurethane hard foam (PUR)

tests

- Pendulum test as per DIN EN 12600 class 1
- Reaction to fire test as per DIN EN 13501-1 / Class of fire E

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m ²)	Sound insulation factor (dB)	Lambda value (W/mK)	U-value (W/m ² K)
20	1.5	17	9.5	28	0.026	1.214
20	2.0	16	12.2	28	0.026	1.273
24	1.5	21	9.7	28	0.026	1.023
24	2.0	20	12.4	28	0.026	1.065
27	1.5	24	9.9	28	0.026	0.915
27	2.0	23	12.5	28	0.026	0.948
30	1.5	27	10.0	28	0.026	0.827
30	2.0	26	12.7	28	0.026	0.855
33	1.5	30	10.2	28	0.026	0.755
34	2.0	30	12.9	28	0.026	0.755

COSMO® Therm - ALU

ALU on one side, PUR core, PVC on rear side white

Top coats

Aluminium coated as per RAL, NCS or DB colour system, other special colours on request, also deliverable with anodized surface


Core material

Polyurethane hard foam (PUR)

tests

- Pendulum test as per DIN EN 12600 class 1
- Reaction to fire test as per DIN EN 13501-1 / Class of fire E

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m ²)	Sound insulation factor (dB)	Lambda value (W/mK)	U-value (W/m ² K)
24	1.5	21	7.8	28	0.026	1.023
40	1.5	37	8.6	28	0.026	0.628



COSMO® Therm - ALU/HD

ALU/HD on both sides, PUR core

Top coats

Aluminium
200µ decorative film on surface

Core material

Polyurethane hard foam (PUR)

tests

- Pendulum test as per DIN EN 12600 class 1
- Reaction to fire test as per DIN EN 13501-1 / Class of fire E

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m ²)	Sound insulation factor (dB)	Lambda value (W/mK)	U-value (W/m ² K)
20	1.5	17	9.5	28	0.026	1.214
24	1.5	21	9.7	28	0.026	1.023
27	1.5	24	9.9	28	0.026	0.915
30	1.5	27	10.0	28	0.026	0.827
33	1.5	30	10.2	28	0.026	0.755



Special Properties

- UV- and weather-resistant
- Moisture-resistant
- Free from CFC and HCFC

Standard sizes (mm)

2000x900, 2150x1150

More than 200 different wood decors and universal films available from our warehouse



COSMO® Therm

Heat-insulating composite panels

COSMO® Therm - ALU/Stucco

ALU/Stucco on both sides, EPS core

Top coats

Aluminium, semi-hard, surface uncoated, Stucco patterned

Core material

Polystyrene-rigid foam, expanded (EPS)

Special Properties

- Moisture-resistant
- Free from CFC and HCFC

Standard sizes (mm)

3100x1250



Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m ²)	Lambda value (W/mK)	U-value (W/m ² K)
14	0.5	13	3.4	0.040	2.020
16	0.5	15	3.5	0.040	1.835
21	0.5	20	3.6	0.040	1.493
24	0.5	23	3.6	0.040	1.342
28	0.5	27	3.7	0.040	1.183

COSMO® Therm - ALU/Stucco

ALU on both sides, PUR core

Top coats

Aluminium, semi-hard, surface uncoated, Stucco patterned

Core material


Polyurethane hard foam (PUR)

Special Properties

- Moisture-resistant
- Free from CFC and HCFC

Standard sizes (mm)

3100x1250



Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m ²)	Lambda value (W/mK)	U-value (W/m ² K)
16	0.5	14.5	3.7	0.026	1.374
20	0.5	18.6	3.8	0.026	1.129

COSMO® Therm - PVC

PVC on both sides, XPS core



Top coats

PVC

Core material

Polystyrene-rigid foam, extruded (XPS)

tests

- Category of resistance / DIN EN 356 P5A / ift test report 213 33640
- Pendulum test / DIN EN 12600 class 1 / ift test report 213 33637
- Airborne sound insulation* as per EN ISO 717-1 Rw 27 (-1;-2) dB / ift test report 164 32607/Z7 (* only panel thickness 24mm)
- Reaction to fire test as per DIN EN 13501-1 / Class of fire E

Special Properties

- Increased impact resistance as per DIN 53453
- Weather-resistant
- UV-resistant in accordance with DIN EN ISO 4892 and meets the requirements of RAL-GZ 716/1
- Moisture-resistant
- CFC- and HCFC-free
- PVC cold weldable using adhesive COSMO® SL-660.110

Standard sizes (mm)

2000x1000, 3000x1500, 3000x2000, 4000x2000

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m ²)	Sound insulation factor (dB)	Lambda value (W/mK)	U-value (W/m ² K)
10	1.0	8.0	3.3	–	0.033	2.357
17	2.0	13	6.4	30	0.033	1.702
20	1.0	18	3.6	–	0.033	1.375
20	1.5	17	5.0	27	0.033	1.423
20	2.0	16	6.9	30	0.033	1.474
23	1.0	21	4.0	–	0.033	1.222
23	1.5	20	5.4	27	0.033	1.260
24	1.0	22	4.0	–	0.033	1.179
24	1.3	21	4.6	–	0.033	1.217
24	1.5	21	5.4	27	0.033	1.214
24	2.0	20	6.5	30	0.033	1.251
27	1.0	25	4.1	–	0.033	1.065
27	1.5	24	5.5	27	0.033	1.093
30	1.0	28	4.2	–	0.033	0.971
30	1.5	27	5.6	27	0.033	0.994
30	2.0	26	6.8	30	0.033	1.019
33	1.0	31	4.3	–	0.033	0.892
33	1.5	30	5.7	27	0.033	0.912
34	2.0	30	6.9	30	0.033	0.907
44	1.0	42	4.6	–	0.033	0.688
49	2.0	45	7.4	30	0.033	0.642

COSMO® Therm

Heat-insulating composite panels

COSMO® Therm - PVC

PVC on both sides, XPS core



Top coats

PVC

Core material

Polystyrene-rigid foam, extruded (XPS)

tests

- Category of resistance / DIN EN 356 P5A / ift test report 213 33640
- Pendulum test / DIN EN 12600 class 1 / ift test report 213 33637
- Airborne sound insulation* / as per EN ISO 717-1 Rw 27 (-1;-2) dB / ift test report 164 32607/Z7 (* only panel thickness 24mm)
- Reaction to fire test as per DIN EN 13501-1 / Class of fire E

Special Properties

- Extremely low GWP factor (Global Warming Potential)
- Increased impact resistance as per DIN 53453
- Weather-resistant
- UV-resistant in accordance with DIN EN ISO 4892 and meets the requirements of RAL-GZ 716/1
- Moisture-resistant
- CFC- and HCFC-free
- cold weldable using COSMO® SL-660.110

Standard sizes (mm)

2000x1000, 3000x1500, 3000x2000

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m²)	Sound insulation factor (dB)	Lambda value (W/mK)	U-value (W/m²K)
24	1.5	21	5.1	27	0.029	1.097
36.5	1.5	33.5	5.6		0.029	0.745

COSMO® Therm - PVC

PVC on both sides, XPS core



Top coats

PVC

Core material

Polystyrene-rigid foam, extruded (XPS)

tests

- Pendulum test / DIN EN 12600 class 1 / ift test report 213 33637
- Reaction to fire test as per DIN EN 13501-1 / Class of fire E

Special Properties

- Increased impact resistance as per DIN EN ISO 179 (DIN 53 453)
- Weather-resistant
- UV-resistant in accordance with DIN EN ISO 4892 and meets the requirements of RAL-GZ 716/1
- Moisture-resistant
- CFC- and HCFC-free
- Paintable using the paint system recommended by us
- cold weldable using COSMO® SL-660.110

Standard sizes (mm)

2000x1000, 3000x1500, 3000x2000

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m²)	Sound insulation factor (dB)	Lambda value (W/mK)	U-value (W/m²K)
23.6	1.3	21	4.5	27	0.033	1.217
24	1.0	22	3.8		0.033	1.179
24	1.5	21	5.1		0.033	1.097
27.6	1.3	25	5.1	27	0.033	1.061
31.6	1.3	29	5.2	27	0.033	0.940
35.6	1.3	32	5.3	27	0.033	0.866

COSMO® Therm - PVC

PVC on both sides, PUR core



Top coats

PVC

Core material

Polyurethane hard foam (PUR)

tests

- Pendulum test / DIN EN 12600 class 1 / ift test report 213 33637
- Reaction to fire test as per DIN EN 13501-1 / Class of fire E

Special Properties

- Increased impact resistance as per DIN EN ISO 179 (DIN 53 453)
- Weather-resistant, moisture-resistant
- UV-resistant in accordance with DIN EN ISO 4892 and meets the requirements of RAL-GZ 716/1
- CFC- and HCFC-free
- Paintable using the paint system recommended by us
- cold weldable using COSMO® SL-660.110

Standard sizes (mm)

2150x950, 2000x1000, 3000x1500, 3000x2000

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m²)	Sound insulation factor (dB)	Lambda value (W/mK)	U-value (W/m²K)
18	1.5	15	5.5	27	0.026	1.308
23	1.5	20	5.8	27	0.026	1.045
24	1.5	21	5.8	27	0.026	1.005
27	1.5	24	6.0	27	0.026	0.900
28	1.5	25	6.0	27	0.026	0.870
33	1.5	30	6.3	27	0.026	0.745
43	1.5	40	6.8	27	0.026	0.579



COSMO® Therm - HPL

HPL on both sides, XPS core



Top coats

High-pressure laminated panels (HPL)

Core material

Polystyrene-rigid foam, extruded (XPS)

tests

Reaction to fire test as per DIN EN 13501-1 /
Class of fire E

Special Properties

- Impact- and shock-resistant as per DIN EN 438/2
- UV- and weather-resistant
- Mechanical resistance: Resistant to abrasion, shock and scratching
- Chemical resistance to: Organic solvents, weak acids and leaches, fuel, oil, resistant to bacteria and fungus attack
- Moisture-resistant
- CFC- and HCFC-free

Standard sizes (mm)

2150x900, 2150x1150, 2800x1860, 2800x2070,
3050x1150, 3050x1300

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m²)	Lambda value (W/mK)	U-value (W/m²K)
20	2.0	16	6.7	0.033	1.497
24	2.0	20	6.8	0.033	1.267
30	2.0	26	7.0	0.033	1.030
33	2.0	29	7.1	0.033	0.942
40	2.0	36	7.3	0.033	0.785

COSMO® Therm - HPL

HPL on both sides, PUR core



Top coats

High-pressure laminated panels (HPL)

Core material

Polyurethane hard foam (PUR)

tests

Reaction to fire test as per DIN EN 13501-1 /
Class of fire E

Special Properties

- Impact- and shock-resistant as per DIN EN 438/2
- UV- and weather-resistant
- Mechanical resistance: Resistant to abrasion, shock and scratching
- Chemical resistance to: Organic solvents, weak acids and leaches, fuel, oil, resistant to bacteria and fungus attack
- Moisture-resistant
- Low weight
- CFC- and HCFC-free

Standard sizes (mm)

2150x900, 2150x1150, 3050x1150, 3050x1300

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m²)	Lambda value (W/mK)	U-value (W/m²K)
20	2.0	16	7.0	0.026	1.252
24	2.0	20	7.2	0.026	1.050
27	2.0	23	7.3	0.026	0.936
30	2.0	26	7.5	0.026	0.845
40	2.0	36	8.0	0.026	0.638

COSMO® Therm - HPL/HD

HPL on one side, decorative film, XPS core, PVC on rear side, white



Top coats

High-pressure laminated panels (HPL)
with 200µ decorative film on surface

Core material

Polystyrene-rigid foam, extruded (XPS)

tests

Reaction to fire test as per DIN EN 13501-1 /
Class of fire E

Special Properties

- UV- and weather-resistant (HPL)
- UV-resistant in accordance with DIN EN ISO 4892 and meets the requirements of RAL-GZ 716/1(PVC)
- Increased impact resistance (PVC)
- Weather-resistant (PVC)
- CFC- and HCFC-free

Standard sizes (mm)

2150x900, 3050x1150, 3050x1300

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m²)	Lambda value (W/mK)	U-value (W/m²K)
23.5	2.0/1.5	20	6.1	0.033	1.267

COSMO® Therm

Heat-insulating composite panels

COSMO® Therm - HPL/HD

HPL on both sides, coated with decorative film, XPS core

Top coats

High-pressure laminated panels (HPL) with 200µ decorative film on surface

Core material

Polystyrene-rigid foam, extruded (XPS)

tests

- Reaction to fire test as per DIN EN 13501-1 / Class of fire E
- Pendulum test / DIN EN 12600 class 1 / ift test report 213 33637

Special Properties

- UV- and weather-resistant
- Moisture-resistant
- CFC- and HCFC-free

Standard sizes (mm)

2150x900, 2150x1150, 3050x1150, 3050x1300

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m²)	Lambda value (W/mK)	U-value (W/m²K)
20	2.0	16	7.2	0.033	1.497
24	2.0	20	7.4	0.033	1.267
25	2.0	21	7.4	0.033	1.220
30	2.0	26	7.6	0.033	1.030
33	2.0	29	7.7	0.033	0.942

COSMO® Therm - HPL/HD

HPL on one side, decorative film, XPS core, HPL on rear side, white

Top coats

High-pressure laminated panels (HPL) with 200µ decorative film on surface

Core material

Polystyrene-rigid foam, extruded (XPS)

tests

Reaction to fire test as per DIN EN 13501-1 / Class of fire E

Special Properties


- UV- and weather-resistant (HPL)
- UV-resistant in accordance with DIN EN ISO 4892 and meets the requirements of RAL-GZ 716/1 (PVC)
- CFC- and HCFC-free

Standard sizes (mm)

2150x900, 3050x1150, 3050x1300

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m²)	Lambda value (W/mK)	U-value (W/m²K)
24	2.0	20	7.4	0.033	1.267

More than 200 different wood decors and universal films available from our warehouse

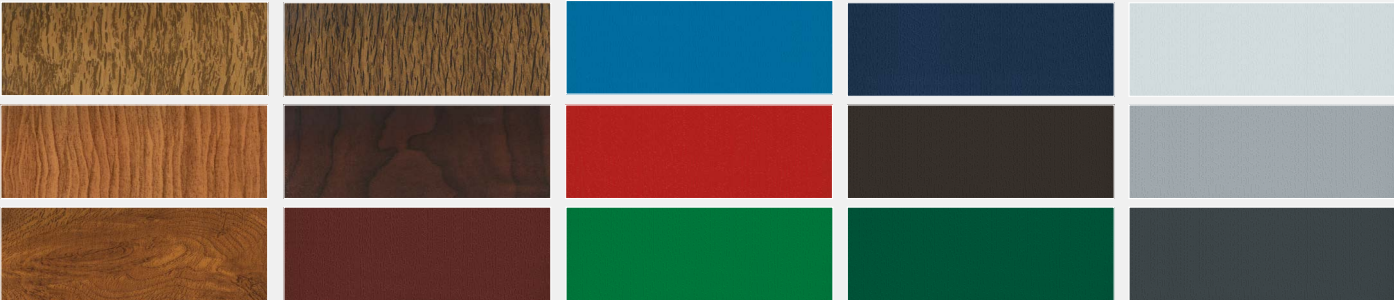

COSMO® Therm - GFK

GFK on both sides, XPS core

Top coats

Glass-fibre reinforced plastics (GRP)

Core material

Polystyrene-rigid foam, extruded (XPS)

Special Properties

- Industrial quality
- High mechanical strength, impact- and shock-resistant
- Weather-resistant
- Short length extension
- Moisture-resistant
- CFC- and HCFC-free

Standard sizes (mm)

4000x2000

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m²)	Lambda value (W/mK)	U-value (W/m²K)
20	1.5	17	6.5	0.033	1.449
24	1.5	21	6.6	0.033	1.232
25	1.5	22	6.7	0.033	1.188
30	1.5	27	6.8	0.033	1.007

COSMO® Therm - GFK

GFK on both sides, PUR core

Top coats

Glass-fibre reinforced plastics (GRP)

Core material

Polyurethane hard foam (PUR)

Special Properties

- Door panel quality
- Gelcoat surface, smooth
- Good mechanical strength due to high percentage of glass
- Weather-resistant
- Low thermal extension
- Especially suitable for the manufacture of front door panels
- Moisture-resistant
- CFC- and HCFC-free

Standard sizes (mm)

2000x900, 2150x1150, 3050x1150

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m²)	Lambda value (W/mK)	U-value (W/m²K)
24	2.0	20	8.8	0.026	1.057

COSMO® Therm

Heat-insulating composite panels

COSMO® Therm - EPO/HD

EPO/HD on one side, PUR core, GRP on rear side

Top coats

Epoxy resin with 200μ decorative film on surface

Core material

Polyurethane hard foam (PUR)

Special Properties

- Coloured top coats which are highly light- and weather resistant

- Short length extension
- High bending strength
- Minimum bending also at high external temperatures
- Moisture-resistant
- CFC- and HCFC-free

Standard sizes (mm)

2000x900, 2100x1000

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m ²)	Lambda value (W/mK)	U-value (W/m ² K)
20	1.0	18	3.5	0.026	1.146
24	1.0	22	3.7	0.026	0.975
28	1.0	26	3.9	0.026	0.847
30	1.0	28	4.0	0.026	0.796

COSMO® Therm - Quick-Tape

Adhesive film on both sides, XPS core

Core material

Polystyrene-rigid foam, extruded (XPS)

Raw density

35kg/m³

Special Properties

- Fast bonding over the whole surface
- Immediate adhesion, fast action, and easy handling

- No handling with adhesive or silicone cartridges
- No dirty surfaces due to adhesive or silicone
- Panels are ready for use immediately after pressing

Standard sizes (mm)

3000x1000

Panel thickness (mm)	Pressure resistance (N/mm ²)	Weight (kg/m ²)	Lambda value (W/mK)	U-value (W/m ² K)
10	0.30	0.4	0.033	2.114
16	0.30	0.6	0.033	1.527
20	0.30	0.7	0.033	1.289
21	0.30	0.7	0.033	1.240
24	0.30	0.8	0.033	1.114
25	0.30	0.8	0.033	1.078
26	0.30	0.9	0.033	1.044
30	0.30	1.1	0.033	0.927
40	0.30	1.3	0.033	0.724
50	0.30	1.6	0.033	0.593
91	0.30	2.8	0.033	0.342
130	0.30	4.0	0.033	0.243

COSMO® Therm - Quick-Tape

Adhesive film on both sides, PUR core

Core material

Polyurethane hard foam (PUR)

Raw density

45-52kg/m³

Special Properties

- Fast bonding over the whole surface
- Immediate adhesion, fast action, and easy handling

- No handling with adhesive or silicone cartridges
- No dirty surfaces due to adhesive or silicone
- Panels are ready for use immediately after pressing

Standard sizes (mm)

2000x1000

Panel thickness (mm)	Pressure resistance (N/mm ²)	Weight (kg/m ²)	Lambda value (W/mK)	U-value (W/m ² K)
10	0.40	0.7	0.026	1.803
16	0.40	1.0	0.026	1.273
20	0.40	1.1	0.026	1.065
21	0.40	1.1	0.026	1.023
24	0.40	1.4	0.026	0.915
25	0.40	1.4	0.026	0.884
26	0.40	1.5	0.026	0.855
30	0.40	1.7	0.026	0.755
40	0.40	2.2	0.026	0.585
50	0.40	2.7	0.026	0.478
90	0.40	4.7	0.026	0.275
130	0.40	6.7	0.026	0.193

COSMO® Therm

Heat-insulating composite panels

COSMO® Therm - SPE

Plywood on both sides, XPS core

Top coats

- Plywood
- Gabon B/BB, peeled veneer
 - Gabon A/BB, sliced veneer
 - Mahogany A/BB, sliced veneer
 - Pine A/BB, sliced veneer
 - Spruce A/BB, sliced veneer
 - Oak A/BB, sliced veneer
 - Larch A/BB, sliced veneer

Core material

Polystyrene-rigid foam, extruded (XPS)

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m ²)	Lambda value (W/mK)	U-value (W/m ² K)
24	4.0	16	5.0	0.033	1.419
28	4.0	20	5.2	0.033	1.211
33	4.0	25	5.3	0.033	1.023
38	4.0	30	5.5	0.033	0.886

COSMO® Therm - SPE

Panel structure

4, 9, 12, 15 and 17 mm plywood smooth,
as per DIN 68 705, A 100

Standard size (mm)

2500 x 1700mm

Top coats

- Plywood
- Gabon B/BB, peeled veneer
 - Gabon A/BB, sliced veneer
 - Mahogany A/BB, sliced veneer
 - Pine A/BB, sliced veneer
 - Spruce A/BB, sliced veneer
 - Oak A/BB, sliced veneer

Special Properties

- Surfaces untreated
- Moisture-resistant
- CFC- and HCFC-free



tests

Reaction to fire test as per DIN EN 13501-1 /
Class of fire E

Special Properties

- Surfaces untreated
- CFC- and HCFC-free

Standard sizes (mm)

2500x1700 (Other dimensions and designs on
request)

COSMO® Silent

Sound-insulating composite panels

Noise is a problem of our modern time. Our environment becomes increasingly noisier. Therefore, it is an important task, to reduce noise pollution effectively to a minimum. We took up this challenge and developed a series of composite panels that have special noise control characteristics in addition to outstanding heat insulation. These elements can be used, for instance, in window sills, doors, shutter housings, machines, or equipment housings or as sound-absorbing hoods. We are offering composite panels of several sound transmission classes (I to V), from which a huge number has been tested by the ift (Institut für Fenstertechnik) referring their noise insulation characteristics.

COSMO® Silent (dB 38) - ALU

ALU on both sides, XPS core, heavy film insert



Top coats

Aluminium coated as per RAL, NCS or DB colour
system, other special colours on request,
also deliverable with anodized surface

Core material

Polystyrene rigid foam, extruded (XPS) with heavy
film insert

Test

Reaction to fire test as per DIN EN 13501-1 / Class of
fire E

Special Properties

- Moisture-resistant
- Low weight
- CFC- and HCFC-free
- Special heavy film for improving the noise
insulation characteristics

Standard sizes (mm)

3000x1500



Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m ²)	Sound insulation factor (dB)	Lambda value (W/mK)	U-value (W/m ² K)
24	1.0	22 (9/4/9)	16.7	38	0.033	1.352

COSMO® Silent (dB 46/50) - ALU

ALU on both sides, core of mineral wool, heavy-film insert



Top coats

Aluminium coated as per RAL, NCS or DB colour
system, other special colours on request,
also deliverable with anodized surface

Core material


Mineral fibre insulating material (MIN) with heavy
film

Special Properties

- Water-repellent
- Heat- and sound-insulating
- Moisture-diffusing
- Special heavy film for improving the noise
insulation characteristics

Standard sizes (mm)

Individually on request



Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m ²)	Sound insulation factor (dB)	Lambda value (W/mK)	U-value (W/m ² K)
31	1.5	27.5 (4/19.5/4)	29.4	46	0.035	1.30
42	2.0	38 (4/30/4)	32.6	50	0.035	0.93

COSMO® Silent

Sound-insulating composite panels

COSMO® Silent (dB 34/36/38) - PVC

PVC on both sides, XPS core, heavy film insert



Top coats

PVC

Core material

Polystyrene rigid foam, extruded (XPS) with heavy film insert

Test

Reaction to fire test as per DIN EN 13501-1 / Class of fire E

Designs

PVC/dB34-XPS, PVC/dB36-XPS, PVC/dB38-XPS

Special Properties

- Increased impact resistance as per DIN EN ISO 179 (DIN 53 453)
- Weather-resistant
- UV-resistant in accordance with DIN EN ISO 4892 and meets the requirements of RAL-GZ 716/1
- Moisture-resistant
- CFC- and HCFC-free
- Low weight
- Special heavy film for improving the noise insulation characteristics
- Paintable - using the paint system recommended by us
- Cold weldable using COSMO®FEN PLUS

Standard sizes (mm)

2000x1000, 3000x1500

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m ²)	Sound insulation factor (dB)	Lambda value (W/mK)	U-value (W/m ² K)
23	1.5	20 (8/4/8)	15.6	36	0.033	1.444
24	2.0	20 (16/4)	16.7	38	0.033	1.432
24	2.0	20 (18/2)	11.8	34	0.033	1.335
34	2.0	30 (26/4)	17.1	38	0.033	0.999
34	2.0	30 (28/2)	12.1	34	0.033	0.951

COSMO® Silent (dB 45/47) - HPL

HPL on both sides, core of mineral wool



Top coats

High-pressure laminated panels (HPL)

Core material

Mineral fibre insulating material (MIN) with heavy film inserts

Designs

- HPL-MIN/dB45 - ift 164 11442/1
- HPL-MIN/dB47 - ift 164 11442/2

Special Properties

- Impact- and shock-resistant as per DIN EN 438/2
- UV- and weather-resistant
- Mechanical resistance: Resistant to abrasion, shock and scratching
- Chemical resistance to: Organic solvents, weak acids and leaches, fuel, oil, resistant to bacteria and fungus attack
- Heat- and sound-insulating
- Moisture-diffusing
- Special heavy film for improving the noise insulation characteristics
- All around with edge strip and vapour-tight film as moisture barrier


Standard sizes (mm)

Individually on request

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m ²)	Sound insulation factor (dB)	Lambda value (W/mK)	U-value (W/m ² K)
27	2.0	4/15/4	26.7	45	0.035	1.52
32	2.0	4/20/4	26.9	47	0.035	1.25

COSMO® Silent (dB 38) - HPL/HD

HPL/HD on both sides, XPS core, heavy film insert



Top coats

High-pressure laminated panels (HPL) with 200µ decorative film surface

Core material

Polystyrene rigid foam, extruded (XPS) with heavy film insert

Test

Reaction to fire test as per DIN EN 13501-1 / Class of fire E

Special Properties

- UV- and weather-resistant
- Moisture-resistant
- CFC- and HCFC-free
- Special heavy film for improving the noise insulation characteristics


Standard sizes (mm)

2150x900, 2150x1150, 3050x1150, 3050x1300

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m ²)	Sound insulation factor (dB)	Lambda value (W/mK)	U-value (W/m ² K)
24	2.0	16	16.8	38	0.033	1.453
28	2.0	20	17.0	38	0.033	1.235

COSMO® Silent (dB 38) - Quick-Tape

Adhesive film on both sides, XPS core, heavy film insert



Core material

Polystyrene rigid foam, extruded (XPS) with heavy film insert

Raw density

32 kg/m³

Special Properties

- Due to the application of a special heavy film, this element in connection with the aluminium top coat on both sides has a very good sound insulating factor (dB 38)
- Fast bonding over the whole surface
- Immediate adhesion, fast action, and easy handling
- No handling with adhesive or silicone cartridges
- No dirty surfaces due to adhesive or silicone
- Panels are ready for use immediately after pressing

Standard sizes (mm)

3000x1500, 3000x1000

Panel thickness (mm)	Core material (mm)	Weight (kg/m ²)	Sound insulation factor (dB)	Lambda value (W/mK)	U-value (W/m ² K)
24	22	16.7	38	0.033	1.360

COSMO® PROTECT

COSMO® Protect

Burglar/penetration-resistive composite panels

Referring to their object-protecting characteristics penetration-resistive composite panels are to be classified in a higher level than glazing with resistance to thrown objects (manual attack). DIN EN 356 specifies the requirements and test methods for penetration-resistive glazing, which is intended to retard external forceful impacts on objects and/or persons within a protected area during a short period of time. If applied, penetration-resistive composite panels should be integrated in frames or structures that themselves provide a reasonable resistance to attacks. Generally, they are divided in classes P6B, P7B and P8B. There are test certificates available issued by ift (Institut für Fenstertechnik) for all three classifications.

COSMO® Protect (P6B/P8B) - ALU

ALU on both sides, XPS core, ALU insert



Top coats

Aluminium coated as per RAL, NCS or DB colour system, other special colours on request, also deliverable with anodized surface

Core material

Polystyrene rigid foam, extruded (XPS) with steel or ALU-insert

Test

Category of resistance / DIN EN 356 P8B / ift test report 213 33643

Burglary resistance measured by axe test	Panel thickness (mm)	ALU insert (mm)	Sound insulation factor (dB)	Lambda value (W/mK)	U-value (W/m²K)
P8B	24	3.0	30	0.033	1.398
P6B	24	2.0	30	0.033	1.341

Special Properties

- Burglar-resistant characteristics
- CFC- and HCFC-free
- With aluminium insert or steel insert

Standard sizes (mm)

2000x1000, 2500x1250, 3000x1500

COSMO® Protect (P7B) - PVC

PVC on both sides, XPS core, ALU insert



Top coats

PVC

Core material

Polystyrene rigid foam, extruded (XPS) with ALU insert

Test

Category of resistance DIN EN 356 P7B / ift test report 213 33641

Burglary resistance measured by axe test	Panel thickness (mm)	ALU insert (mm)	Lambda value (W/mK)	U-value (W/m²K)
P7B	24	3.0	0.033	1.364

Special Properties


- Increased impact resistance as per DIN EN ISO 179 (DIN 53 453)
- Weather-resistant
- UV-resistant in accordance with DIN EN ISO 4892 and meets the requirements of RAL-GZ 716/1
- Moisture-resistant
- CFC- and HCFC-free
- Burglar-resistant characteristics

Standard sizes (mm)

2000x1000, 2500x1250, 3000x1500

COSMO® Protect - PVC

PVC on both sides, XPS core, PVC insert



Top coats

PVC compact panel white, the external top coats are equipped with protective film

- Weather-resistant
- UV-resistant

Core material

Polystyrene-rigid foam, extruded (XPS)

- Thermal conductivity group 035
- Raw density 33 kg/m³
- Pressure resistance 0.30 N/mm² as per DIN 53421
- Moisture-resistant
- Free from CFC and HCFC

Test

- Successfully tested for shock resistance as per following standards/test standards: NF P 08-301, P 08-302 (France) Test report No.: 403 / 19 / 13242
- LNE TESTED (P191046) as per „EN 13501-1+A1 : 2013“ tested: Classification E.
- Certified by Avis Technique - No. 6/16-2330_V2 Class of fire E


Panel thickness (mm)	PVC insert (mm)	Lambda value (W/mK)	U-value (W/m²K)	Specific weight (kg/m²)
24	1.30	0.033	1.246	5.7
28	1.30	0.033	1.083	5.9

COSMO® Design

Grooved composite panels

We are offering composite panels with milled top coats made of plywood, aluminium, PVC compact panels or HPL-high-pressure laminated panels with different milling patterns in accordance with the design overview. A very special performance is provided by our COSMO® Art Design elements with surface patterns like concrete, rust or slate.

Design overview for milled top coats (applies to all surfaces)

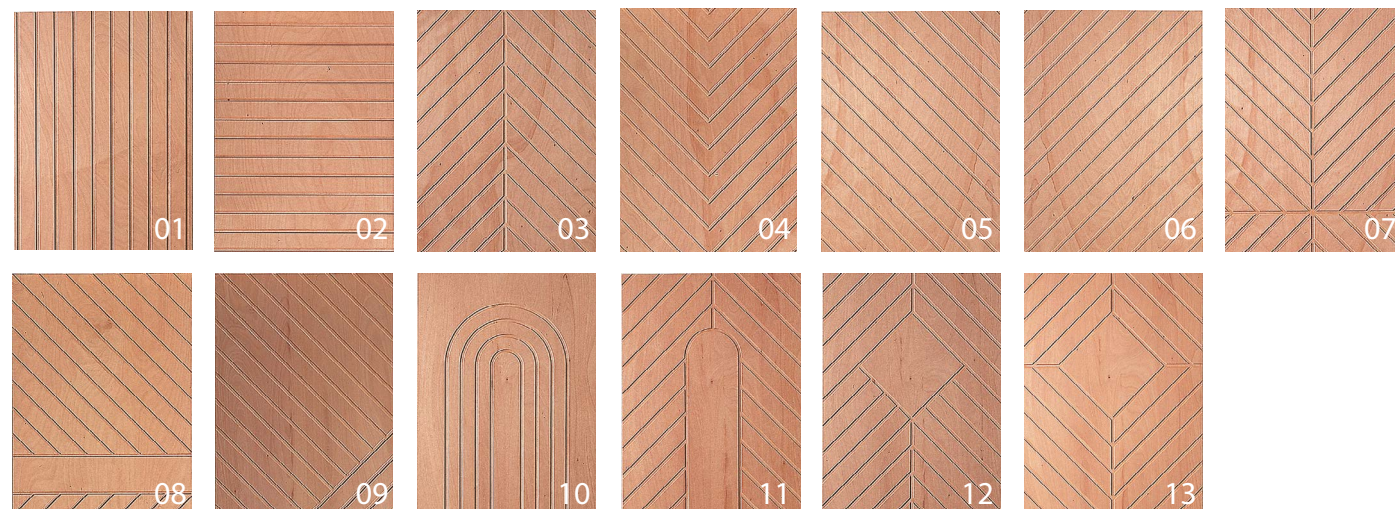

Groove dimensions on request

COSMO® Design - SPE

Plywood on both sides, XPS

Top coats

- Plywood
- Gabon B/BB, peeled veneer
- Gabon A/BB, sliced veneer
- Mahogany A/BB, sliced veneer
- Pine A/BB, sliced veneer
- Spruce A/BB, sliced veneer
- Oak A/BB, sliced veneer
- Larch A/BB, sliced veneer

Special Properties

- Surfaces untreated
- Surfaces sliced or peeled veneer
- CFC- and HCFC-free

Standard sizes (mm)

2500x1700 (Other dimensions and designs on request)

Groove type: Softline groove 
Groove centre distance: 100mm; groove width: 8mm; groove depth: 4.5 mm

Core material

XPS

Test

Reaction to fire test as per DIN EN 13501-1 / Class of fire E

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m ²)	Lambda value (W/mK)	U-value (W/m ² K)
29.5	9.5	16	8.1	0.033	1.353

COSMO® Design - SPE

Panel structure

- 9 mm plywood, at least 5-fold bonded as per DIN 68 705, A 100
- Milled groove design in accordance with design overview

Standard size (mm)

2500 x 1700 x 9.5mm

Groove type: Softline groove 
Groove centre distance: 100mm; groove width: 8mm; groove depth: 4.5 mm



COSMO® Design - ALU

ALU on both sides, XPS core



Top coats

Aluminium, milling patterns in accordance with the design overview, coated as per RAL, NCS or DB colour system, other special colours on request

Core material

Polystyrene-rigid foam, extruded (XPS)

Test

Reaction to fire test as per DIN EN 13501-1 / Class of fire E

Special Properties

- Milled groove design in accordance with the design overview
- Moisture-resistant
- CFC- and HCFC-free

Standard sizes (mm)

2000x1000

Groove type: Wide groove 
Groove centre distance: 100mm; groove width: 12mm; groove depth: 1.2 mm

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m ²)	Sound insulation factor (dB)	Lambda value (W/mK)	U-value (W/m ² K)
24	2.0	20	9.8	30	0.033	1.289

COSMO® Design - PVC

HPL on one side, XPS core, PVC on rear side, smooth



Top coats

PVC, milled groove, corresponding to our design overview

Core material

Polystyrene-rigid foam, extruded (XPS)

Test

Reaction to fire test as per DIN EN 13501-1 / Class of fire E

Special Properties

- Milled groove design in accordance with the design overview
- Surface white painted
- Increased impact resistance as per DIN EN ISO 179 (DIN 53 453)
- Weather-resistant
- Moisture-resistant
- CFC- and HCFC-free

Standard sizes (mm): 2000x1000, 3000x1500

Groove type: Wide groove 
Groove centre distance: 100mm; groove width: 12mm; groove depth: 1.2 mm

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m ²)	Sound insulation factor (dB)	Lambda value (W/mK)	U-value (W/m ² K)
24	2.5/1.5	20	7	30	0.033	1.251

COSMO® Design - HPL

HPL-groove on both sides, XPS core



Top coats

High-pressure laminated panels (HPL)

Core material

Polystyrene-rigid foam, extruded (XPS)

Test

Reaction to fire test as per DIN EN 13501-1 / Class of fire E

Special Properties

- Milled groove in accordance with design overview
- Surface painted as per RAL (special paints on request)
- Weather-resistant
- Moisture-resistant
- CFC- and HCFC-free

Standard sizes (mm): 2150x900

Groove type: Wide groove 
Groove centre distance: 100mm; groove width: 12mm; groove depth: 12 mm

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m ²)	Sound insulation factor (dB)	Lambda value (W/mK)	U-value (W/m ² K)
24	3.0/2.0	19	8.1	29	0.033	1.312

COSMO® Tech

Individual composite panels

COSMO® Tech - PVC

PVC on both sides, PR core



Top coats

PVC

Core material

PUR recycling panel (PR)

Special Properties

- Increased impact resistance as per DIN EN ISO 179 (DIN 53 453)
- Weather-resistant, moisture-resistant
- UV-resistant
- Suitable for sawing, milling, grinding, slot cutting, drilling and screwing

Standard sizes (mm)

2000x1000, 3000x1500



Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m²)	Lambda value (W/mK)	U-value (W/m²K)
20	2.0	16	14.2	0.076	2.477
24	2.0	20	16.2	0.076	2.191
30	2.0	26	19.2	0.076	1.869
34	2.0	30	21.2	0.076	1.701

COSMO® Tech - PVC

PVC on both sides, XPS core, TK inserts



Top coats

PVC

Core material

Polystyrene rigid foam, extruded (XPS) with inserts made of thermoplastic plastics material (TK)

Special Properties

- Minimum absorption of humidity
- Low weight
- Screwable with industrial screws for timber construction
- Durably moisture-resistant
- Environmentally-friendly inserts (TK is 100% recyclable)

Standard sizes (mm)

on request



Variant	Panel thickness (mm)	Top coats (mm)	Core material (mm)
XPS/035/TK150	23	1.5	20
XPS/035/TK150	29	1.5	26
XPS/035/TK200	23	1.5	20
XPS/035/TK200	29	1.5	26

COSMO® Tech - HPL

HPL on both sides, PR core



Top coats

High-pressure laminated panels (HPL)

Core material

PUR recycling panel (PR)

Special Properties

- Impact- and shock-resistant as per DIN EN 438/2
- UV- and weather-resistant
- Mechanical resistance: Resistant to abrasion, shock and scratching
- Chemical resistance to: Organic solvents, weak acids and leaches, fuel, oil, resistant to bacteria and fungus attack
- Moisture-resistant
- Low weight
- Suitable for sawing, milling, grinding, slot cutting, drilling and screwing

Standard sizes (mm)

2800x1860, 2800x2070



Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m²)	Lambda value (W/mK)	U-value (W/m²K)
24	2.0	20	16.2	0.076	2.241
28	2.0	24	18.2	0.076	2.005
30	2.0	26	19.2	0.076	1.905
34	2.0	30	21.0	0.076	1.731

COSMO® Tech - HPL

HPL on both sides, PUR core, PR insert



Top coats

High-pressure laminated panels (HPL)

Core material


Polyurethane hard foam (PUR)
PUR recycling panel (PR)

Special Properties

- Impact- and shock-resistant as per DIN EN 438/2
- UV- and weather-resistant
- Mechanical resistance: Resistant to abrasion, shock and scratching
- Chemical resistance to: Organic solvents, weak acids and leaches, fuel, oil, resistant to bacteria and fungus attack
- Moisture-resistant
- Low weight
- Suitable for sawing, milling, grinding, slot cutting, drilling and screwing
- CFC- and HCFC-free (PUR)

Standard sizes (mm)

3050x1300



Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m²)	Lambda value (W/mK)	U-value (W/m²K)
25	1.5	22 (6.5/9.0/6.5)	11.4	0.026	1.30
27	1.5	24 (7.5/9.0/7.5)	11.5	0.026	1.20
31	1.5	28 (9.5/9.0/9.5)	11.7	0.026	1.03

COSMO® Tech

Individual composite panels

COSMO® Tech - HPL

HPL on both sides, TK core

Top coats

High-pressure laminated panels (HPL)

Core material

Thermoplastic plastics material (TK/150)

Special Properties

- Minimum absorption of humidity due to closed cell
- Outstanding mechanical characteristics
- Low weight
- Screwable with industrial screws for timber construction
- Screwing together without pre-drilling (core)
- Durably moisture-resistant
- Swelling-resistant, i.e. no changes of dimensions
- High pressure resistance
- Environmentally-friendly inserts (TK is 100% recyclable)

Standard sizes (mm)

2800x1860, 2800x2070

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m ²)	Lambda value (W/mK)	U-value (W/m ² K)
28	2.0	24	9.8	0.041	1.301
30	2.0	26	10.1	0.041	1.223

COSMO® Tech - GFK

GRP on one side anti-slip, TK core, GRP on rear side, smooth

Top coats

Glass-fibre reinforced plastics (GRP)

Core material

Thermoplastic plastics material (TK)

Field of application

Floor elements


Special Properties

- Minimum absorption of humidity
- Outstanding mechanical characteristics
- Low weight
- Screwable with industrial screws for timber construction
- Durably moisture-resistant
- Swelling-resistant, i.e. no changes of dimensions
- High pressure resistance
- Environmentally-friendly inserts (TK is 100% recyclable)
- Slipping class R12 (fine) R13 (medium)

Standard sizes (mm)

on request

Variant	Panel thickness (mm)	Top coats (mm)	Core material (mm)	Lambda value (W/mK)	U-value (W/m ² K)
XPS-P/TK150	23	1.5	20	0.041	1.509
XPS-P/TK150	29	1.5	26	0.041	1.236
XPS-P/TK200	23	1.5	20	0.043	1.562
XPS-P/TK200	29	1.5	26	0.043	1.283



COSMO® Tech - GFK

GFK on both sides, TK core

Top coats

Glass-fibre reinforced plastics (GRP)

Core material

Thermoplastic plastics material (TK)

Field of application

Automotive manufacturing

Special Properties

- Minimum absorption of humidity
- Outstanding mechanical characteristics
- Low weight
- Screwable with industrial screws for timber construction
- Durably moisture-resistant
- Swelling-resistant, i.e. no changes of dimensions
- High pressure resistance
- Environment-friendly core material (100% recyclable)

Standard sizes (mm)

on request

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m ²)	Lambda value (W/mK)	U-value (W/m ² K)
23	1.5	20 / TK150	7.9	0.041	1.51
29	1.5	26 / TK150	8.8	0.041	1.24
23	1.5	20 / TK200	8.9	0.043	1.56
29	1.5	26 / TK200	10.1	0.043	1.28



COSMO® Frame

Frame widening elements



COSMO® Frame - PVC

PVC on both sides, XPS/TK core



Top coats

PVC compact panels, white with protective film

Core material

Polystyrene rigid foam, extruded (XPS);
thermoplastic plastics (PR)

Field of application

- Widening of frames
- substructure of lifting/sliding doors

Test

Airborne sound insulation as per EN ISO 717-1
Rw 36 (-1;-1) dB

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m ²)	Sound insulation factor (dB)	Lambda value (W/mK)	U-value (W/m ² K)
70	2	12/26/28	13.3		0.033/0.043	0.497
74	2	18/26/26	13.4		0.033/0.043	0.469
84	2	20/26/34	13.7	33	0.033/0.043	0.411
90	2	12/26/48	13.9		0.033/0.043	0.378



COSMO® Frame (dB) - PVC

PVC on both sides, XPS/PR core, heavy film insert



Top coats

PVC compact panels, white with protective film

Core material

Polystyrene rigid foam, extruded (XPS);
PUR-recycling panel (PR)

Field of application

- Widening of frames
- substructure of lifting/sliding doors

Test

Airborne sound insulation as per EN ISO 717-1 Rw
40 (-1;-1) dB, ift 164 32607/Z10

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m ²)	Lambda value (W/mK)	Sound insulation factor (dB)	U-value (W/m ² K)
70	2	24/4,0/26/12	32.2	0.033/0.076	40	0.606
74	2	22/4,0/26/18	32.3	0.033/0.076		0.546



COSMO® Frame - PVC

PVC on both sides, XPS/PR core



Top coats

PVC compact panels

Core material

Polystyrene rigid foam, extruded (XPS);
PUR-recycling panel (PR)

Field of application

- Widening of frames
- substructure of lifting/sliding doors

Test

Airborne sound insulation as per EN ISO 717-1 Rw 36
(-1;-1) dB, ift 164 32607/Z11

Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m ²)	Sound insulation factor (dB)	Lambda value (W/mK)	U-value (W/m ² K)
70	2	28/26/12	22.2	36	0.033/0.076	0.572
74	2	26/26/18	22.5		0.033/0.076	0.535
84	2	20/26/34	22.8		0.033/0.076	0.461
86	2	8/26/48	22.9		0.033/0.076	0.448
88	2	12/26/46	23.0		0.033/0.076	0.436
90	2	12/26/48	23.1		0.033/0.076	0.425



COSMO® Frame (dB) - PVC

PVC on both sides, XPS/TK core, heavy film insert



Top coats

PVC compact panels, white with protective film

Core material

Polystyrene-rigid foam, extruded (XPS);
Thermoplastic plastics material (TK)

Field of application

- Widening of frames
- substructure of lifting/sliding doors


Special Properties

- Noise insulating
- Moisture-resistant
- Weather-resistant
- UV-resistant
- CFC- and HCFC-free
- Suitable for sawing, milling, grinding, slot cutting, screwing and drilling
- Swelling-resistant and no changes of dimensions

Standard sizes (mm)

3000x1500, 4000x1500


Panel thickness (mm)	Top coats (mm)	Core material (mm)	Weight (kg/m ²)	Lambda value (W/mK)	Sound insulation factor (dB)	U-value (W/m ² K)
70	2	24/4,0/26/12	21.7	0.033/0.043		0.523
74	2	22/4,0/26/18	21.8	0.033/0.043		0.492
84	2	20/4,0/26/30	23.5	0.033/0.043	37	0.428






Always up to date

We are happy to bring our products and fields of application closer to you at the www.weiss-chemie.de and to keep you informed about the latest developments.

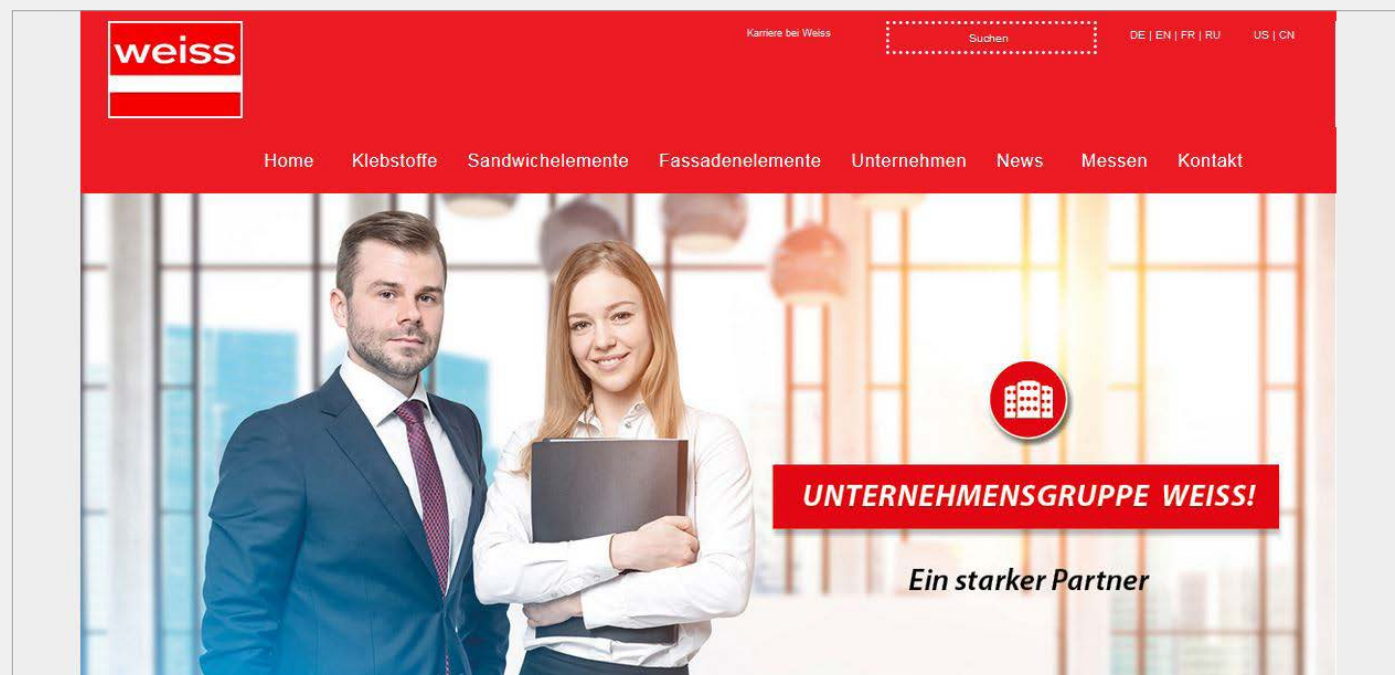

Current issues




- + By our slide show and our News column you are always informed on current topics and remain up to date.

Fields of Application



- + The structure of our Fields of Application enables you to intentionally look for application solutions and conveniently to navigate to your search target.

Service / Downloads



- + In our Product / Application area, you will directly find the appropriate contact person. In addition, you can easily download all print media as well as data sheets.

Trade fairs



- + Visit us at our booths at the national and international trade fairs and obtain information online about all details and facts referring our participations in trade fairs.

PUDOL – Cleaning and maintenance products

- + PUDOL stands for convincing quality of special products in the field of commercial cleaning. In addition to a complete range of cleaning and care products for different applications, we are offering a comprehensive service with interesting solutions and benefits. Visit our website: www.pudol.de

Cleanliness refreshes your senses



Customer support

Flexibility and the creation of customer-oriented problem solutions count among the elementary objectives of our company. Therefore, it is very important to us to provide professional and innovative solutions with convincing advantages for production methods and with high efficiency in close cooperation with our customers.

A highly motivated team of application engineers, materials testers and chemists with long-term experience in development, modification, materials science, building physics and application of adhesives and composite panels is on hand with help and advice for you.



Application engineering Adhesives



- + Support with creating the requirements specification
- + Expert advice on the selection of adhesives
- + Optimisation tips for the design of the bonding surfaces
- + Rationalisation proposals for work flows
- + Recommendation of suitable dosing units as well as application and pressing technology
- + Optimisation of workplaces when using adhesives
- + Training for workers and specialist dealers; technical lectures
- + Creation and modification of adhesives in our Research and Development department



Test possibilities in our application technology and internal research and development department

- + With our own test facilities we are not only able to test in compliance with DIN and EN standards but we can also evaluate your components (component sizes) under operating conditions in a practice-oriented way. In addition, we ensure the high quality of our products on the basis our cooperation with the most diverse testing institutes.



Application engineering Composite panels



- + Individual Panel structure
- + Application-specific material components
- + Project-related proposals for solutions
- + Selection of materials in accordance with construction-physical requirements and conditions




Test possibilities in our Technical Centre

- + **Materials tests:**
 - Storage at alternating climate
 - 3-point bending rigidity
 - Perpendicular tensile strength
 - Colour measurement
 - Storage in water
 - Determination of U-values
- + Furthermore, we are working together with famous testing institutes that are responsible for fire protection and sound insulation.



Are you also a member of LinkedIn? Then follow us. We regularly post interesting news. You will find us at:
Weiss Chemie + Technik GmbH & Co. KG.



An overview of our range of products

Experience quality on a completely new level, with the powerful products by Weiss:



COSMO® Adhesives

Durably firm joints

COSMO® CA (Cyanoacrylates)
COSMO® PU (Polyurethane adhesives)
COSMO® CL (Cleaning agents)
COSMO® SL (Dispersion adhesives)
COSMO® HD (Hybrid adhesives)
COSMO® EP (Epoxy-resin adhesives)
COSMO® DS (Dispersion adhesives)
COSMO® SP (Service products)

Fields of application

- + Windows and doors
- + Transportation / Marine engineering
- + Industry
- + Assembly
- + Dry construction
- + Airtight bonding
- + Wood / Furniture industry
- + Container construction
- + Composite panels
- + Fire protection
- + Advertising industry

Do you have any questions?

Our Service Center
Adhesives Division:

+49 (0) 2773 / 815 - 255
+49 (0) 2773 / 815 - 274



COSMO® Composite Panels

Unlimited possibilities for design

COSMO® Therm (Thermal insulation)
COSMO® Silent (Sound insulation)
COSMO® Protect
(Burglar/penetration resistant)
COSMO® Design (Grooved elements)
COSMO® Tech (Individual elements)
COSMO® Frame (frame widening)

Fields of application

- + Window and façade
- + Door construction
- + Industry
- + Automotive manufacturing
- + Trailer construction
- + Partition panel construction
- + Gate construction
- + Container construction
- + Energy conservation
- + Fire protection
- + Burglar resistance
- + Sound proofing

Do you have any questions?

Our Service Center
Composite Panels Division:

+49 (0) 2773 / 815 - 311

Our Service Center
Façade Division:

+49 (0) 5245 / 9241 - 21



PUDOL Cleaning and maintenance products

Cleanliness refreshes your senses

PUDOL SOFT
Mild cleaning agent for sensitive materials
PUDOL CARE
Maintenance product for high gloss and hygiene
PUDOL POWER
Powerful cleaning agent for extreme pollution
PUDOL FRESH
Cleaning agent for cleanliness and fresh air

Fields of application

- + FLOORING
- + Sanitary area
- + Clothing care
- + Food industry
- + Household and gastronomy
- + Windows and glass
- + Dishwasher
- + Carpet and upholstery
- + Industry and workshop
- + Cars
- + Skin cleaning
- + Skin protection

Do you have any questions?

Our Service Center PUDOL:

+49 (0) 2743 / 9212 - 0



Plant I
Weiss Chemie + Technik
GmbH & Co. KG
Hansastr. 2
D-35708 Haiger

Phone: +49 (0) 2773 / 815 - 0
Fax: +49 (0) 2773 / 815 - 200
E-mail: ks@weiss-chemie.de

www.weiss-chemie.de

Plant II
Weiss Chemie + Technik
GmbH & Co. KG
Siemensstr. 8
D-33442 Herzebrock-Clarholz

Phone: +49 (0) 5245 / 9241 - 0
Fax: +49 (0) 02773-815-300
E-mail: se@weiss-chemie.de

PUDOL



**A subsidiary of the
Weiss Group**

Pudol Chemie GmbH & Co. KG
Bahnhofstr. 2
D-57520 Niederdreisbach

Phone: +49 (0) 2743 / 9212 - 0
Fax: +49 (0) 2743 / 9212 - 71
E-mail: info@pudol.de
www.pudol.de

Cleanliness refreshes your senses

made by weiss